

## MOVE

### Version

Built-in 120 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122353326



## FEATURES

**Sliding door**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Optional combined regenerable Carbon.Zeo filter**  
**Optional Chimney**  
**Optional glass shelf**  
**Dimmable led lighting**  
**Dynamic LED Light (2700K - 5600K)**

Availability Carbon.Zeo filter  
 KACL.961 for hoods produced from 02.09.2021.

Dimmable led lighting from 11.07.23

## OPTIONAL ACCESSORIES

### KACL.108

Glass shelf 120 cm

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h  
 Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.934

Carbon.Zeo filters

### KACL.961

Charcoal and Zeolite filter

### KCVJN.00#3

Telescopic chimney h 185 + h 185

### KCVJN.01#3

Chimney h 120 mm

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

120 cm

### Finishing

Scotch brite stainless steel (AISI 304)

Lower part in black tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 3x1,2 W - 2700 K / 5600 K

### Filter

4 x Metallic filter "Base" - 198x161 mm

### Charcoal filter

Charcoal and Zeolite filter (optional)

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

24.1 kg

### Net weight

20 kg

### Volumes

0.25 m<sup>3</sup>

### Packaging size

Length

1295 mm

Height

410 mm

Depth

465 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)




500 Pa

### Max. motor power

215 W

## ENERGY CLASS

B



## MOVE

### Version

Built-in 120 cm - Black - 800  
m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122353326

## MOTOR TECHNICAL SHEET

| Motor speed  | 1   | 2   | 3   | 4   |
|--|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 49  | 56  | 62  | 68  |
| Capacity (m <sup>3</sup> /h)<br>I.E.C.61591            | 280 | 370 | 480 | 680 |
| Maximum pressure (Pa)                                  | 390 | 420 | 480 | 500 |
| Motor Power (W)  | 132 | 153 | 175 | 215 |
| Air outlet   | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE

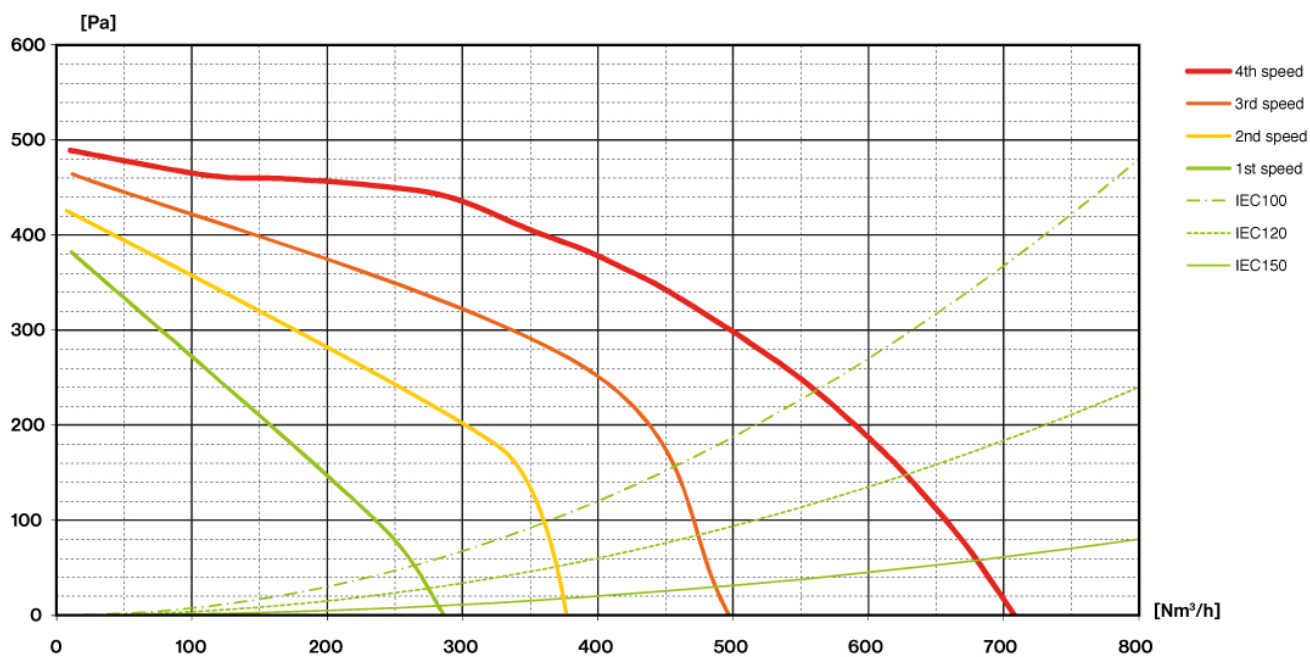

## MOVE

### Version

Built-in 120 cm - Black - 800 m3/h


### Collection

Design

### EAN code

8034122353326

## ENERGY LABEL

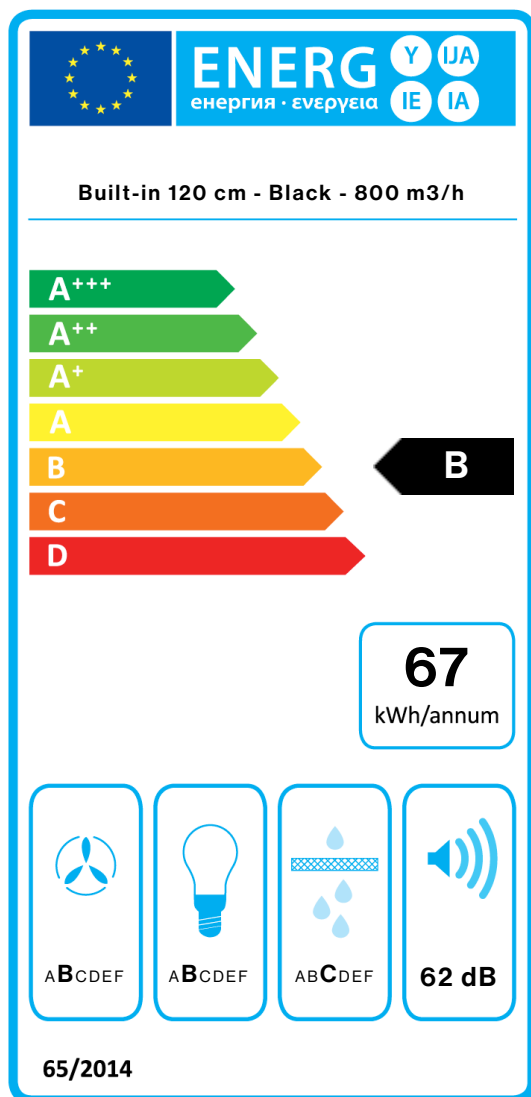

| PF         |                                    |                   |
|------------|------------------------------------|-------------------|
| S          | Falmec Spa                         |                   |
| M          | Built-in 120 cm - Black - 800 m3/h |                   |
| AEC        | 67,0                               | kWh/a             |
| EEC        | B                                  |                   |
| FDE        | 26,3                               |                   |
| FDEC       | B                                  |                   |
| LE         | 20,7                               |                   |
| LEC        | B                                  |                   |
| GFE        | 80,0                               |                   |
| GFEC       | C                                  |                   |
| Qmin       | 280,0                              | m <sup>3</sup> /h |
| Qmax       | 480,0                              | m <sup>3</sup> /h |
| Qboost     | 680,0                              | m <sup>3</sup> /h |
| SPEmin     | 49                                 | dBa               |
| SPEmax     | 62                                 | dBa               |
| SPEboost   | 68                                 | dBa               |
| PO         | -                                  | W                 |
| PS         | 0,48                               | W                 |
| PI         |                                    |                   |
| F          | 1,1                                |                   |
| EEL        | 64,3                               |                   |
| Qbep       | 382,0                              | m <sup>3</sup> /h |
| Pbep       | 384                                | Pa                |
| Qboost     | 680,0                              | m <sup>3</sup> /h |
| Wbep       | 155,1                              | W                 |
| WL         | 6,50                               | W                 |
| Emiddle    | 134                                | lex               |
| Lwa-SPEmax | 62                                 | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.